
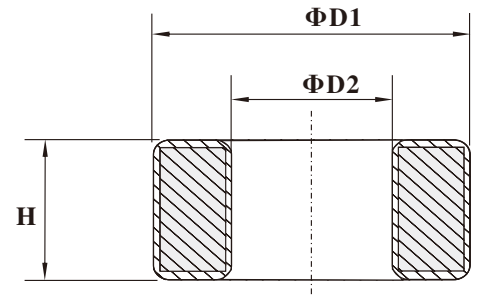


P3 ... **T17.5*9.5***, **C/P**
Material Core Size Coating
 材质 品名 涂装

C=Epoxy. P=Parylene.


Dimensions: (UNIT:mm)

Dimensions(mm)			
Epoxy Coating Dimensions(mm)			
ΦD1	ΦD2	H	Wt(g/set)
17.5±0.40	9.5±0.30	.00±0.30	
18.60max	8.60 min	.90 max	



Test Conditions

AL: F=10.0KHz U=0.3V N=10Ts

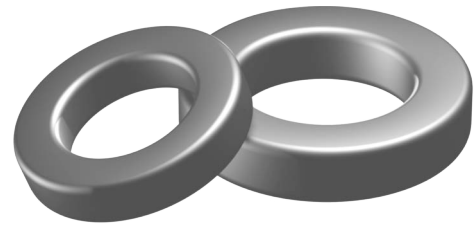

Effective parameter

	Ve(mm3)	Ae(mm2)	Le(mm)
	1357	32	42

Coating


The core are coated with epoxy, flame retardant in accordance with "UL 94V-0" file number E228348. The colour is green.

Ring core data


GRADE	AL(nH)	μi	TYPE NUMBER
P3	2350±25%	≈2300	T17.5/9.5/8/P3
H5K	4900±25%	≈5000	T17.5/9.5/8/H5K
H7K	6850±25%	≈7000	T17.5/9.5/8/H7K
H10K	9800±30%	≈10000	T17.5/9.5/8/H10K

Note:


- 1: Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2: RoHS compliant.




P3



H5K



H7K



H10K