
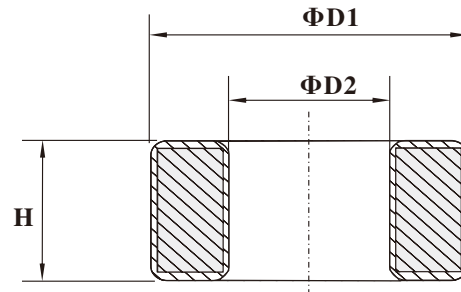


P3 **T31*19*8** **C/P**
Material **Core Size** **Coating**
 材质 品名 涂装

C=Epoxy. P=Parylene.


Dimensions: (UNIT:mm)

Dimensions(mm)			
Epoxy Coating Dimensions(mm)			
ΦD1	ΦD2	H	Wt(g/set)
31.0±0.50	19.0±0.50	8.0 ±0.40	18.2
32.10max	18.0min	8.90max	



Test Conditions

AL: F=10.0KHz U=0.3V N=10Ts

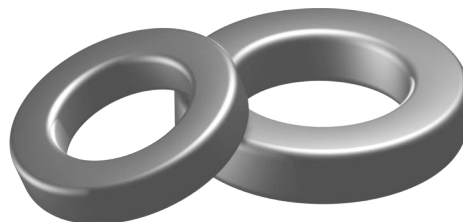

Effective parameter

	Ve(mm3)	Ae(mm2)	Le(mm)
	3550	47.1	75.5

Coating

The core are coated whth epoxy,
 flame retardant in accordance
 with "UL 94V-0"file number E228348.


The colour is green.

Ring core data


GRADE	AL(nH)	μi	TYPE NUMBER
P3	1900±25%	≈2300	T31/19/8/P3
H5K	3900±25%	≈5000	T31/19/8/H5K
H7K	5500±25%	≈7000	T31/19/8/H7K
H10K	7800±30%	≈10000	T31/19/8/H10K

Note:


- 1:Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2:RoHS compliant.




P3



H5K



H7K



H10K