
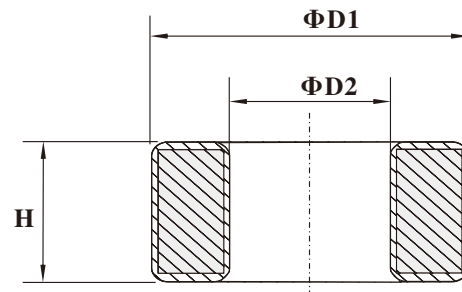


P3 **T79*50*26.5** **C/P**
Material **Core Size** **Coating**
 材质 品名 涂装

C=Epoxy. P=Parylene.


Dimensions: (UNIT:mm)

Dimensions(mm)			
Epoxy Coating Dimensions(mm)			
ΦD1	ΦD2	H	Wt(g/set)
79.0±1.50	50.0±1.0	26.5±0.7	355.0
81.0max	48.0min	28.0max	



Test Conditions

AL: F=10.0KHz U=0.3V N=10Ts

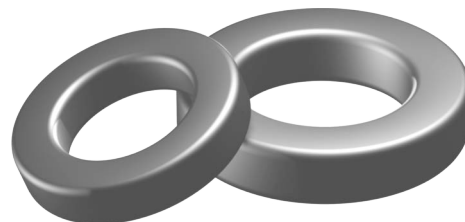

Effective parameter

	Ve(mm3)	Ae(mm2)	Le(mm)
	73913	377.6	196

Coating

The core are coated with epoxy,
 flame retardant in accordance
 with "UL 94V-0" file number E228348.


The colour is green.

Ring core data


GRADE	AL(nH)	μi	TYPE NUMBER
P3	4725±25%	≈2300	T79/50/26.5/P3
H5K	10800±25%	≈5000	T79/50/26.5/H5K
H7K	15200±25%	≈7000	T79/50/26.5/H7K
H10K	23000±30%	≈10000	T79/50/26.5/H10K

Note:


- 1: Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2: RoHS compliant.




P3



H5K



H7K



H10K