



P/N: FACSCE2580-560M

RoHS


Outline Dimensions(Unit:mm)

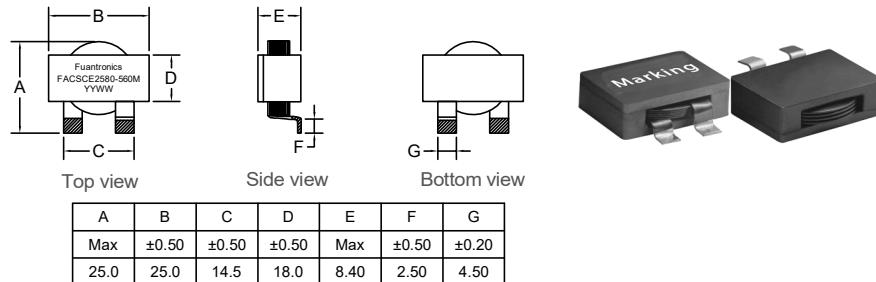

Electronical Schematic



Suggested Pad layout

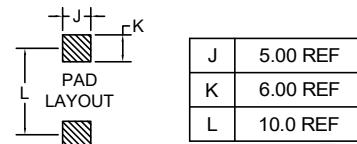

***Assemblage design, sturdy structure.

***Small volume, high current, low magnetic loss, low ESR, small parasitic capacitance.

***Closed magnetic circuit, ultra low buzz noise.

***Temperature rise current and saturation current is less influenced by environment.

Electrical Characteristics(@25°C)

Inductance 100KHz,0.1V	DC Resistor	Saturated current 3A	Temperature rise current 20A
56.0uH $\pm 20\%$	15.6mΩ Max	$L(3A)=80\% \cdot L_{OA} \text{ Typ}$	$T \leq 40^\circ\text{C} \text{ Typ}$

***Saturation current: the actual value of DC current when the inductance decrease 20% of its initial value.


***Temperature rise current: the actual value of DC current when the temperature rise is $\Delta T = 40^\circ\text{C}$ ($T_a = 25^\circ\text{C}$).

***Operating Temperature: $-40^\circ\text{C} \sim +125^\circ\text{C}$.
(Temperature rise included)


***Storage Temperature: $-40^\circ\text{C} \sim +125^\circ\text{C}$.

***Storage Humidity: RH10%~70%.

Saturation current VS temperature rise current curve:

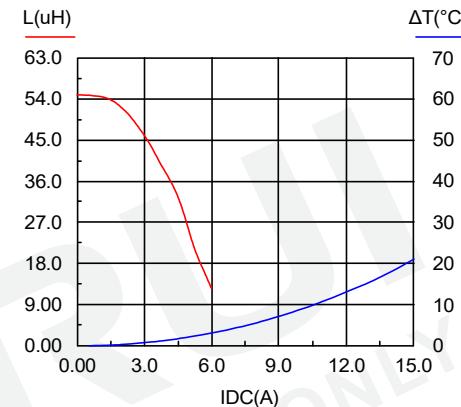

Recommended Soldering Temperature Graph.

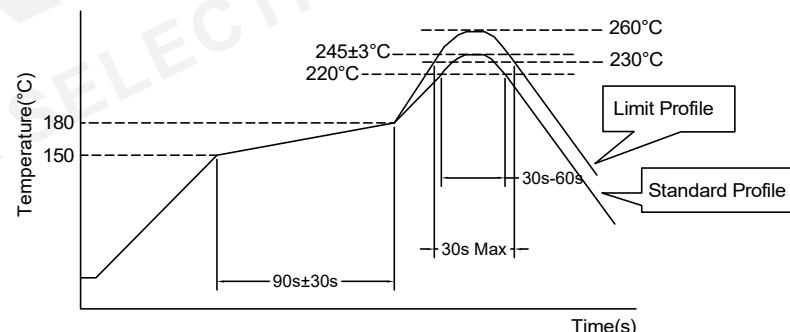

	Standard Profile	Standard Profile
Pre-heating	150~180°C, 90s \pm 30s	
Heating	above 220°C, 30s-60s	above 240°C, 30s Max
Peak temperature	245°C \pm 3°C	260°C, 10s
Cycle of reflow	2 times	2 times

				Tianchang Fuan Electronic Co Ltd www.fuantronics.net TEL: +86-550-7814888 FAX:+86-550-7831133	 Tolerances unless otherwise specified: (.X) ± 0.50 (.XX) ± 0.25 Unit of measurement: mm	Make: Qiumei.Liu Checked: Beson.zhan Approved: Anson.zhan	DRAWING TITLE HIGH CURRENT POWER INDUCTORS	Customer Name:
REV	DESCRIPTION	APPD	DATE					Document/Rev: 00 Specification Sheet: 1 of 1 Material Number: A342580XS080 Date of Recognition: Jan./02/2020