



P/N: FACSCF2918T-100MC

RoHS


Outline Dimensions(Unit:mm)



Top view



Side view




Bottom view




Marking:

A	B	C	D	E	F	G	H	I	J
Max	Max	± 0.50	± 0.30	Max	Max	Min	± 1.00	REF	REF
27.9	27.9	6.63	3.80	19.7	17.8	3.80	6.50	5.00	4.50

Electronical Schematic



Suggested Pad layout

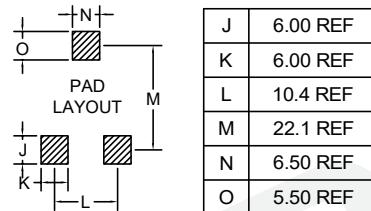

***Assemblage design, sturdy structure.

***High inductance, high current, low magnetic loss, low ESR, small parasitic capacitance.

***Flat wire winding, achieve a low D.C. Resistance.

***Temperature rise current and saturation current is less influenced by environment.

Electrical Characteristics(@25°C)

Inductance 100KHz,0.1V	DC Resistor	Saturated current 31.2A	Temperature rise current 28A
10.0uH $\pm 20\%$	2.86mΩ Max	L(31.2A)=80%*L0A Typ	T $\leq 40^\circ C$ Typ

***Saturation current: the actual value of DC current when the inductance decrease 20% of its initial value.


***Temperature rise current: the actual value of DC current when the temperature rise is $\Delta T=40^\circ C$ (Ta=25°C).

***Operating Temperature: -40°C~+125°C.
(Temperature rise included)


***Storage Temperature: -40°C~+125°C.

***Storage Humidity:RH10%~70%.

Saturation current VS temperature rise current curve:

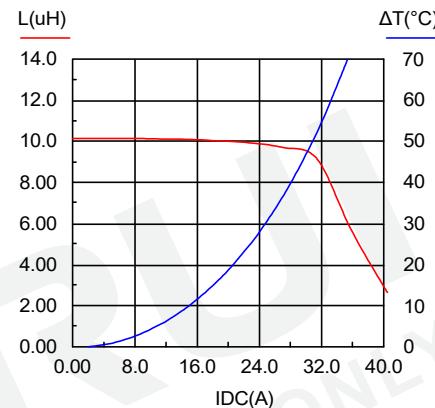

Recommended Soldering Temperature Graph.

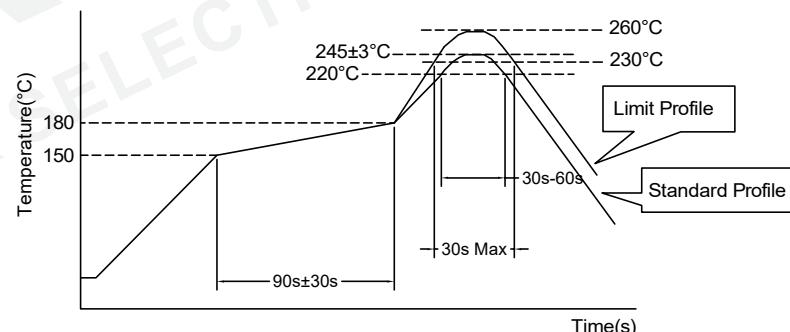

	Standard Profile	Standard Profile
Pre-heating	150~180°C, 90s $\pm 30s$	
Heating	above 220°C, 30s-60s	above 240°C, 30s Max
Peak temperature	245°C $\pm 3^\circ C$	260°C, 10s
Cycle of reflow	2 times	2 times

				Tianchang Fuan Electronic Co Ltd www.fuantronics.net TEL: +86-550-7814888 FAX:+86-550-7831133	 Tolerances unless otherwise specified: (.X) ± 0.50 (.XX) ± 0.25 Unit of measurement: mm	Make: Qiumei.Liu Checked: Beson.zhan Approved: Anson.zhan	DRAWING TITLE HIGH CURRENT POWER INDUCTORS	Customer Name:
REV	DESCRIPTION	APPD	DATE					Document/Rev: 00
								Specification Sheet: 1 of 1
							Material Number: A342918TS030	Date of Recognition: Jan./02/2020