T1/CEPT/ISDN-Pri Module

FEATURES

Compliant with CCITT&FCC standard.
Provide 1500Vrms isolation
RoHS compliant

Electrical Specification@25°C Operating Temperature 0 to 70°C

Part Number	Turn Ratio	OCL (mH Min)	LL (uH Max)	Cww (pF Max)	DCR Pri (Ohm Max)	DCR Sec (Ohm Max)	Primary pins	Package
FAT11201SR	1:1.15CT& 1CT:2CT	1.60&1.60	0.80&0.80	60&50	1.0&1.0	1.20&2.0	12-10,4-6	A
FAT11202SR	1:1:1.26& 1:2CT	1.20&1.20	0.80&0.80	50&60	1.0&1.0	1.10&1.70	12-10,4-6	A
FAT11203SR	1CT:1.15CT& 1CT:1.15CT	1.20&1.20	0.80&0.80	50&50	1.20&1.20	1.40&1.40	1-3,4-6	A
FAT11204SR	1CT:2CT& 1CT:2CT	1.20&1.20	0.60&0.60	35&35	0.70&0.70	1.20&1.20	12-10,4-6	A
FAT11205SR	1CT:1.36CT& 1CT:1.36CT	1.20&1.20	0.80&0.80	50&50	1.20&1.20	1.40&1.40	1-3,4-6	A
FAT11206SR	1CT:1.41CT& 1CT:1.41CT	1.20&1.20	0.80&0.80	50&50	1.40&1.40	1.20&1.20	12-10,9-7	A
FAT11207SR	1CT:2CT& 1CT:1.36CT	1.20&1.20	0.60&0.80	35&37	0.70&0.70	1.20&0.90	12-10,4-6	A

Dimension : mm(inch)+/-0.25(0.01)

A

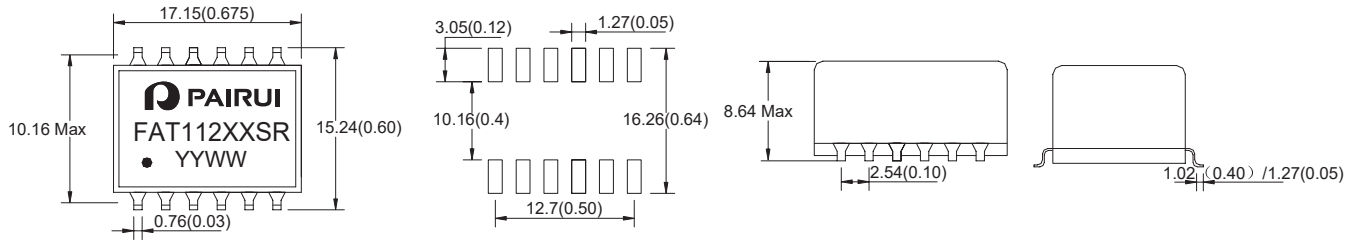

Schematic

FAT11201SR,FAT11203SR,FAT11204SR, FAT11205SR,FAT11206SR



FAT11202SR



FAT11207SR