

# 50W EI66/34.7 FAPE6634H SERIES



## FEATURES

Frequency 50/60Hz  
 Potted under vacuum  
 Split-bobbin  
 Temperature class ta 40°C/B  
 Weight: 1.04kg  
 Packaging unit: 6 pieces [tray]


## OPTIONS

Bulk packaging is standard  
 Custom design available

## COMMON APPLICATIONS

Medical equipments  
 Industrial equipments  
 Industrial controls  
 Test equipments  
 Industrial computers  
 Avionics & telecom

## PHYSICAL CHARACTERISTICS

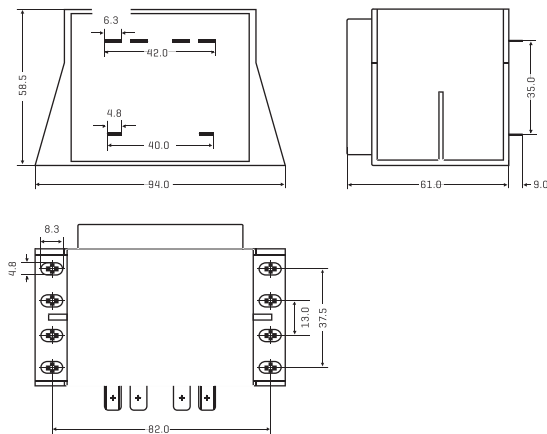

## ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE663401H	230	6/8333	7.2	1
FAPE663402H	230	9/5560	10.4	1
FAPE663403H	230	12/4170	13.4	1
FAPE663404H	230	15/3330	17	1
FAPE663405H	230	18/2780	20.5	1
FAPE663406H	230	24/2080	27.1	1
FAPE663407H	230	2*6/4170	2*7	2
FAPE663408H	230	2*9/2780	2*10.4	2
FAPE663409H	230	2*12/2080	2*13.6	2
FAPE663410H	230	2*15/1670	2*17.6	2

## TECHNICAL INFORMATION

FIG 1





FIG 2



ALL DIMENSIONS IN MM

# 50W EI66/34.7 FAPE6634H SERIES



## FEATURES

Frequency 50/60Hz  
 Potted under vacuum  
 Split-bobbin  
 Temperature class ta 40°C/B  
 Weight: 1.04kg  
 Packaging unit: 6 pieces [tray]


## OPTIONS

Bulk packaging is standard  
 Custom design available

## COMMON APPLICATIONS

Medical equipments  
 Industrial equipments  
 Industrial controls  
 Test equipments  
 Industrial computers  
 Avionics & telecom

## PHYSICAL CHARACTERISTICS

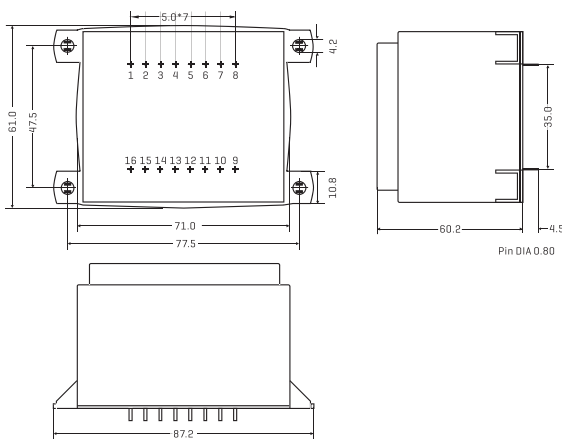

## ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE663411H	2*115	6/8333	7.2	1
FAPE663412H	2*115	9/5560	10.4	1
FAPE663413H	2*115	12/4170	13.4	1
FAPE663414H	2*115	15/3330	17	1
FAPE663415H	2*115	18/2780	20.5	1
FAPE663416H	2*115	24/2080	27.1	1
FAPE663417H	2*115	2*6/4170	2*7	2
FAPE663418H	2*115	2*9/2780	2*10.4	2
FAPE663419H	2*115	2*12/2080	2*13.6	2
FAPE663420H	2*115	2*15/1670	2*17.6	2

## TECHNICAL INFORMATION

FIG 1





FIG 2



ALL DIMENSIONS IN MM