

60W UI48/26 FAUI4826 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.53kg
 Packaging unit: 10 pieces (tray)
 Fixing material for 2.5mm (0.098 inch)
 Self-tapping screws: DIN 7513 (M 3x8)
 Sheet-metal screws: DIN 7971 (2.9x6.5)


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS

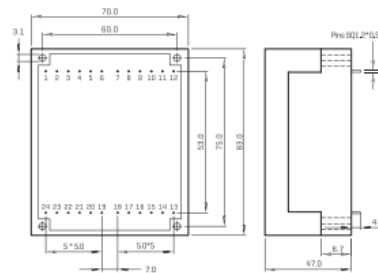

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAUI 482673	2*6	2*5000	2*6.6	1
FAUI 482674	2*9	2*3333	2*9.9	1
FAUI 482675	2*12	2*2500	2*13.1	1
FAUI 482676	2*15	2*2000	2*16.4	1
FAUI 482677	2*18	2*1667	2*19.7	1
FAUI 482678	2*24	2*1250	2*26.3	1

TECHNICAL INFORMATION

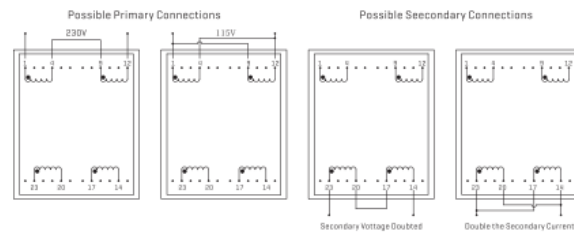

ALL DIMENSIONS IN MM