

10W UI30/16.5 FAUI3016 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 40°C/B
 Weight: 0.24kg
 Packaging unit: 15 pieces (tray)
 Fixing material for 2.5mm (0.098 inch)
 Self-tapping screws: DIN 7513 (M 3x8)
 Sheet-metal screws: DIN 7971 (2.9x6.5)


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS

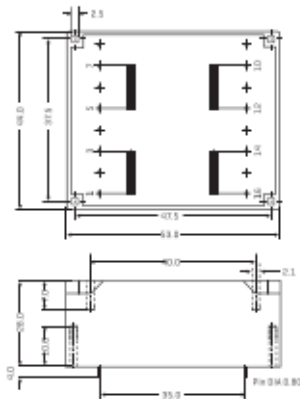

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI301631	2*115	2*6/833	2*7.9
FAUI301632	2*115	2*9/556	2*11.9
FAUI301633	2*115	2*12/417	2*15.9
FAUI301634	2*115	2*15/333	2*19.8
FAUI301635	2*115	2*18/278	2*23.7
FAUI301636	2*115	2*24/208	2*31.7

TECHNICAL INFORMATION

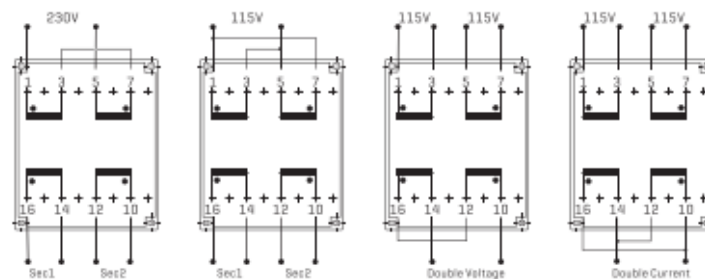

ALL DIMENSIONS IN MM