



P/N: FAPE3813110




Outline Dimensions(Unit:mm)



Front View



Side View

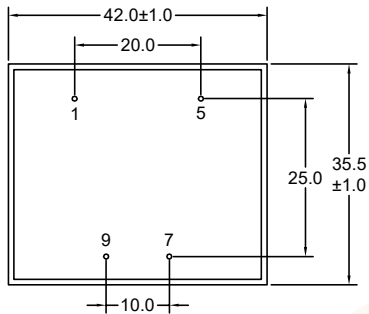

Bottom View



Top View

Note:


- 1.Remove Pins 2,3,4,6,8,10.

Wave Soldering



- Note:
- 1.Never Contact the ceramic with the iron tip;
  - 2.1.0mm tip diameter(max).

Electronical Schematic

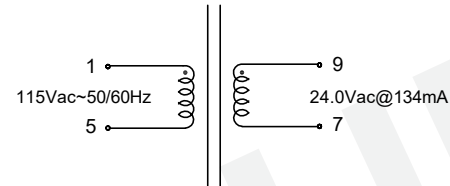

Electrical Characteristics


- Input 115Vac 60Hz to 1-5 :
- Excitation current(Ix):15mA Max.
- Output: Vo=32.1Vac Typ(No-load).
- VL=24.0Vac±5%(@134mA).
- Hi-Pot: Pri-Sec:4000VAC/5mA/60Second.

General Properties

- Operating Temperature:-25°C to +70°C.
- Storage Temperature:-25°C to +85°C.
- Insulation Class: B.
- Weight: 0.155kg.

REV	DESCRIPTION	APPD	DATE	Tianchang Fuan Electronic Co Ltd www.fuantronics.net TEL: +86-550-7814888 FAX: +86-550-7831133	<p>Tolerances unless otherwise specified:                  (X)±0.50 (XX)±0.25                  Unit of measurement: mm</p>	Make: Qiumei.Liu Checked: Beson. zhan Approved: Anson. zhan	<b>DRAWING TITLE</b> 3.20W Encapsulated Transformer For EI38*13.6,115VAC Input 50/60Hz Material Number: A223813XS170	Customer Name: Document/Rev: 00 Specification Sheet: 1 of 2 Date of Recognition: Jan./02/2020

P/N: FAPE3813110



List of UL Certificate:

No.	Part Name	Mat'l Description	Supplier	UL Number
1	Bobbin	EI38*13.6/PBT(Black)	Chang Chun Plastics Co Ltd	E59481
2	Case	CASE-EI38*13.6/PA66(Orange)	Zhejiang Juner New Materials Co Ltd	E204321
3	Copper wire	2UEW-H/180C	Elektrisola Hangzhou Co Ltd	E258243
4	Core	Lamination	Ta Yea Steel Industry Co Ltd	N/A
5	Epoxy	PU552(Black)	Wevo-Chemle Gmbh	E108835
6				



				Tianchang Fuan Electronic Co Ltd www.fuantronics.net TEL: +86-550-7814888 FAX: +86-550-7831133	Tolerances unless otherwise specified: (.X)±0.50    (.XX)±0.25 Unit of measurement: mm	Make: Qiumei.Liu	<b>DRAWING TITLE</b> 3.20W Encapsulated Transformer For EI38*13.6,115VAC Input 50/60Hz Material Number: A223813XS170	Customer Name:
						Checked: Beson. zhan		Document/Rev: 00
REV	DESCRIPTION	APPD	DATE			Approved: Anson. zhan		Specification Sheet: 2 of 2 Date of Recognition: Jan./02/2020