


## SPECIFICATION FOR APPROVAL

### Material

Production:	Iron Powder Cores
FUAN.P/N:	KT51-8C
AL:	37.0(nH/N <sup>2</sup> )(±10%)
Material:	-8
Coating Color:	Yellow/Red
Coating material:	epoxy
Coating Breakdown Voltage:	600V, 0.5mA, 2Sec

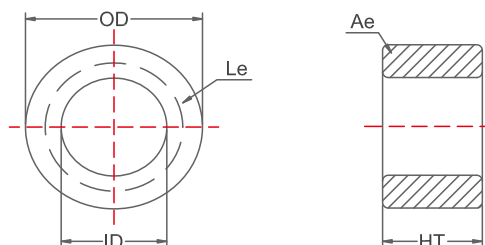


### Physical Characteristics

After Coating			Le(cm)	Ae(cm <sup>2</sup> )	V(cm <sup>3</sup> )	W(cm <sup>2</sup> )	Weight (g) (ref.)	Box Quantity (Pieces)
OD mm	ID mm	Ht mm						
12.7±0.50	5.08±0.50	6.35±0.50	2.790	0.223	0.622	0.317	4.12	3000


### Electrical Parameters(Typical)      Temperature(25°C±2°C)

Test Item	Test Condition	Value(Typical)	Test Instrument
Inductance	φ0.29mm/20Ts, 10kHz/1V, I=0A (Evenly full windings)	14.8μH(±10%)	CH3302
DC-Bias	φ0.50mm/28Ts,10kHz/1V,L(4.0A)/L(0A)*100%(H=50Oe) (Evenly full windings)	82%(Min.)	WK3255B+WK3265B
Core Loss	250KHz/100Gs	55mW/cm <sup>3</sup> (Max.)	SY-8219
Q	φ0.50mm/28Ts, 200kHz/1V, I=0A (Evenly full windings)	25.0(Min.)	CH3302
Remarks	Set the internal resistance of LCR meter to 100Ω.		

DC-Bias Curves(Typical)

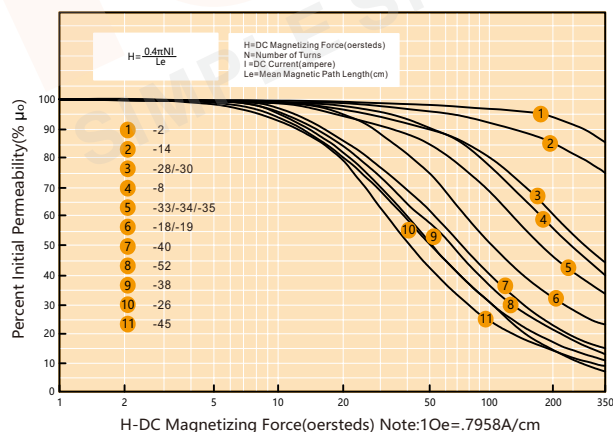

Core Loss Curves(Typical)

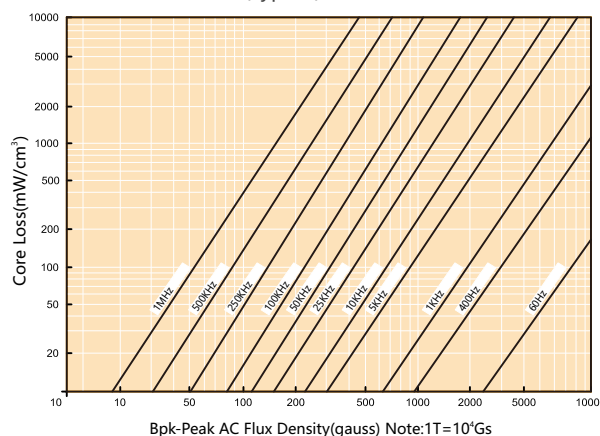

Iron Powder Cores is a magnetic core which use traditional production arts, after the pure powder which content of Fe is more than 99% surface insulation coating and then mixed pressed with organic binder. Because it hasn't been conducted in the high temperature, so it's used temperature is -65C ~ +125C. Products including permeability 10ui-100ui, toroid, E type,