



**P3**      **T25\*15\*13**      **C/P**  
**Material**    **Core Size**    **Coating**  
 材质            品名            涂装

C=Epoxy. P=Parylene.

## Ferrite core


### Dimensions: (UNIT:mm)

Dimensions(mm)			Wt(g/set)
Epoxy Coating Dimensions(mm)			
ΦD1	ΦD2	H	20.00
25.0±0.40	15.0±0.40	13.0±0.40	
26.0max	14.0min	13.9max	

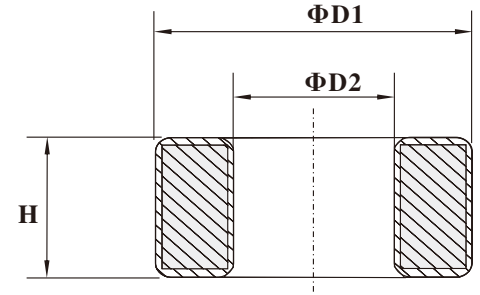

### Test Conditions

AL: F=10.0KHz U=0.3V N=10Ts

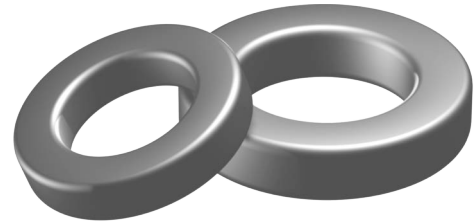

### Effective parameter

	Ve(mm <sup>3</sup> )	Ae(mm <sup>2</sup> )	Le(mm)
	3830	63.6	60.2

### Coating


The core are coated with epoxy, flame retardant in accordance with "UL 94V-0" file number E228348. The colour is green.

### Ring core data


GRADE	AL(nH)	μi	TYPE NUMBER
P3	3200±25%	≈2300	T25/15/13/P3
H5K	6650±25%	≈5000	T25/15/13/H5K
H7K	9300±25%	≈7000	T25/15/13/H7K
H10K	13300±30%	≈10000	T25/15/13/H10K

### Note:


- 1: Document is the property of FUAN Inc & is not allowed to be duplicated without authorization
- 2: RoHS compliant.




P3



H5K



H7K



H10K