






P/N: FAPL16H-102Y4R0

ROHS

Outline Dimensions (Unit:mm)



REMARK:
1. Product vacuum impregnation.


Electrical Characteristics

Inductance : 1.0mH Min, at 10KHz, 0.1V.
 Rated current : 4.0Amps.
 D.C. Resistance : 40.0 mohms Max.
 Turns Ratio : Wdg1:Wdg2=1:1±1%, at 20KHz, 1V.
 Hipot : Coil-Coil : 1500VAC/3mA/2S.


General Properties:

Operating Temperature: -40°C to +125°C
 (Temperature rise included).
 Storage Temperature: -25°C to +85°C.
 Storage Humidity: RH10%~70%.
 Weight: ≈20.0g

Current VS Temp. (Simulation test)

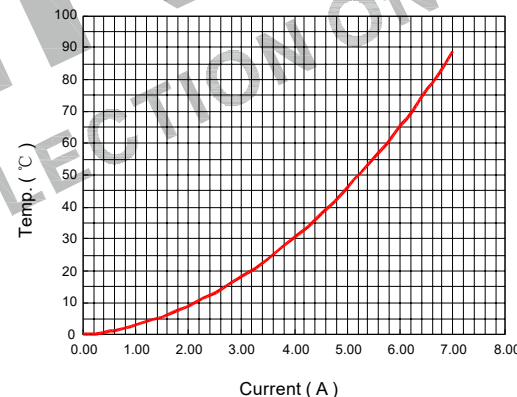


Electronical Schematic



"•" Polarity point


Winding Construction:

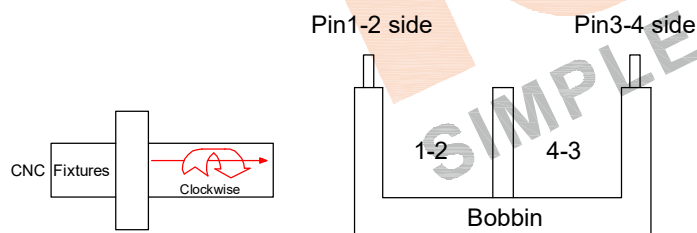

List of UL Certificate:

No.	Part Name	Mat'l Description	Supplier	UL Number
1	Bobbin	UU-1602 /T375J	Chang Chun Plastics Co Ltd	E59481
2	Copper wire	2UEW-F/155C	Dong Guan YiDa Industrial Co Ltd	E344055
3	Core	UU16-H10K	Fuan	N/A
4	Clip	UU16/SUS301	Chuangshun Hardware Electronic Factory	N/A
5	Varnish	T-4260(a)/MW80-C	SuZhou TaiHu Electric Advanced Material Co Ltd	E228349

Tianchang Fuan Electronic Co Ltd
 www.fuantronics.net
 TEL: +86-550-7814888
 FAX: +86-550-7831133



Tolerances unless otherwise specified:
 (X)±0.50 (XX)±0.25
 Unit of measurement: mm

Make: *Jun*
 Checked: *BenSon*
 Approved: *AmSon*

DRAWING TITLE
 UU16 COMMON-CODE
 FILTER INDUCTOR
 Material Number: A24PL16XA250

Customer P/N:
 Document/Rev: 2201122/00
 Specification Sheet: 1 of 1
 Date of Recognition: Jan./02/2021

REV	DESCRIPTION	APPD	DATE