

10W EI48/16.8 FAPE4816 SERIES

FEATURES

Two compartments bobbin
Self-extinguishing plastics UL94V-0
Degree of protection IP67
Weight: 0.3kg
Temperature class to 40 °C/B

Design complies with the following certifications:

	UL5085-1
	UL5085-3
	CSA-C22.2-66.1-06
	CSA-C22.2-66.3-06




COMMON APPLICATIONS

Medical equipments
Industrial equipments
Industrial controls
Test equipments
Industrial computers
Avionics & telecom

OPTIONS


Bulk packaging is standard
Custom design available

PHYSICAL CHARACTERISTICS

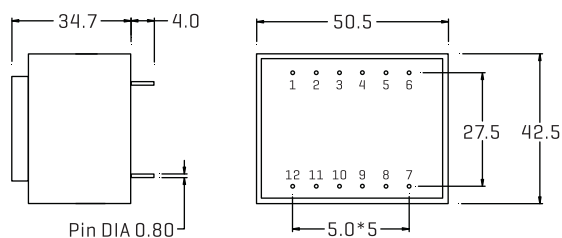

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION

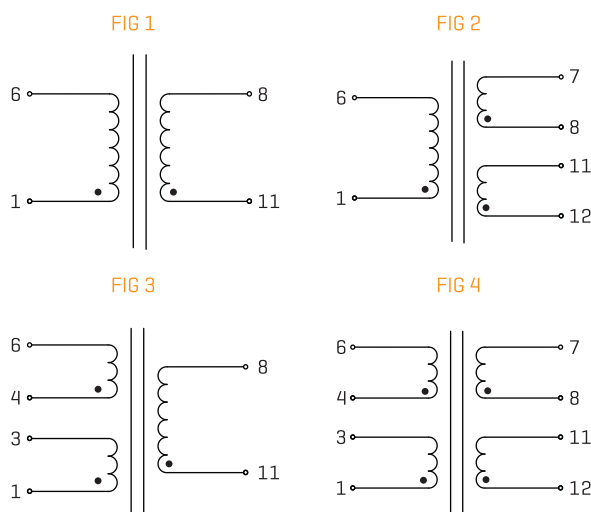

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE481665	230	6/1666	7.9	1
FAPE481666	230	9/1111	12.0	1
FAPE481667	230	12/834	14.7	1
FAPE481668	230	15/666	19.2	1
FAPE481669	230	18/555	22.9	1
FAPE481670	230	24/416	30.6	1
FAPE481671	230	2*6/834	2*8.1	2
FAPE481672	230	2*9/555	2*11.6	2
FAPE481673	230	2*12/416	2*15.7	2
FAPE481674	230	2*15/333	2*19.5	2
FAPE481675	230	2*18/277	2*23.5	2
FAPE481676	230	2*24/208	2*30.0	2
FAPE481677	115	6/1666	7.9	1
FAPE481678	115	9/1111	12.0	1
FAPE481679	115	12/834	14.7	1
FAPE481680	115	15/666	19.2	1
FAPE481681	115	18/555	22.9	1
FAPE481682	115	24/416	30.6	1
FAPE481683	115	2*6/834	2*8.1	2
FAPE481684	115	2*9/555	2*11.6	2
FAPE481685	115	2*12/416	2*15.7	2
FAPE481686	115	2*15/333	2*19.5	2
FAPE481687	115	2*18/277	2*23.5	2
FAPE481688	115	2*24/208	2*30.0	2
FAPE481689	2*115	6/1666	7.9	3
FAPE481690	2*115	9/1111	12.0	3
FAPE481691	2*115	12/834	14.7	3
FAPE481692	2*115	15/666	19.2	3
FAPE481693	2*115	18/555	22.9	3
FAPE481694	2*115	24/416	30.6	3
FAPE481695	2*115	2*6/834	2*8.1	4
FAPE481696	2*115	2*9/555	2*11.6	4
FAPE481697	2*115	2*12/416	2*15.7	4
FAPE481698	2*115	2*15/333	2*19.5	4
FAPE481699	2*115	2*18/277	2*23.5	4
FAPE4816100	2*115	2*24/208	2*30.0	4