



P/N: FACCF1010V-402Y1R5-P1


Outline Dimensions(Unit:mm)




Orthographic view



Side view




Top view




Bottom view

Electronical Schematic:

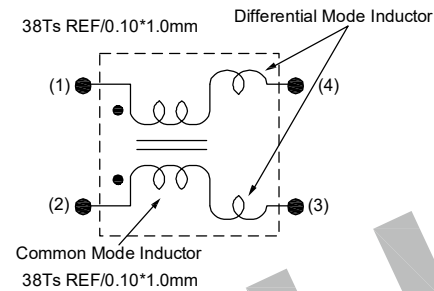

Current VS Temp.(Simulation test).

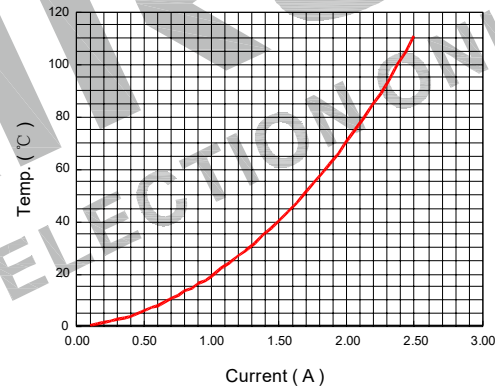

Electrical Characteristics(at 25°C)


Inductance : 4.0mH Min,at 1KHz,0.25V.  
 Inductance balance : L1-L2= 150uH Max,at 1KHz,0.25V.  
 Lstray: Lkg=42.0uH typ,at 1KHz,0.25V.  
 Rated current: 1.5Amps.  
 D.C.Resistance : 150 mohms Max.  
 Turns Ratio : Wdg1:Wdg2= 1:1±2%,at 20KHz,1V.  
 Hipot : Pri-Sec : 1500VAC/1mA/2Second.

List of UL Certificate:

Part Name	Mat'l Description	Supplier	UL Number
Base	SQ10/T375HF	Chang Chun Plastics Co Ltd	E59481
Copper wire	SFT-UEW-H	Ningbo Jintian New Material Co Ltd	E227047
Core	SQ10/10-H10K	ShanDong HengRui Magnet Technology Co Ltd	N/A
Epoxy or Varnish	YZ-HC-1401C	YouZhi Electronic(DongGuan)Co.,Ltd	N/A
	T4260LZ	Suzhou Taihu Electric Advanced Material Co., Ltd	E228349

\*\*\*Weight:Approx 2.6g.

Tianchang Fuan Electronic Co Ltd  
 www.fuantronics.net  
 TEL: +86-550-7814888  
 FAX: +86-550-7831133



Tolerances unless otherwise specified:  
 (.X)±0.50 (.XX)±0.25  
 Unit of measurement: mm

Drawn: *Jin*  
 Checked: *Ben Son*  
 Approved: *An Son*

**DRAWING TITLE**  
 CCF1010V Current-compensated  
 frame core double chokes  
 Material Number:

Customer P/N:  
 Document/Rev: 2207052/00  
 Specification Sheet: 1 of 1  
 Date of Recognition: July./12/2022

REV	DESCRIPTION	APPD	DATE